

Stationary

Hardware attached to an existing structure


Not Suspended

Parallel Mount Between



Recommended perpendicular support every 5ft

Width of parallel unistrut must equal width of curtain panel

Minimum 4"
past structure
on each side




U-Bolt (P/N S2785)
*2 Places

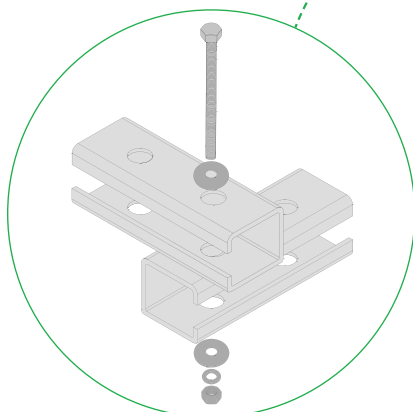

Strut Connection Hardware Package (P/N S2S)

4" - 3/8" - 16 Bolt
2 each: Washer
Lock Washer
3/8" - 16 Nut

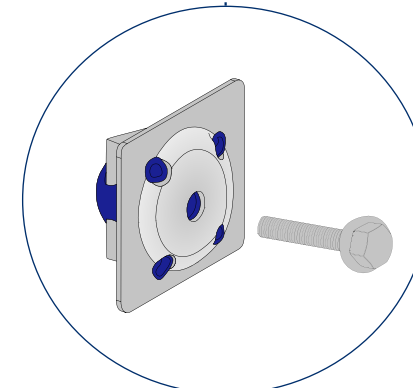

Quick Washer (P/N QW-1062 EG)
1/4" - 20 Bolt (P/N QS-92865)